


# AU-G12F series

- ◆ High reliability with protect film based on our proprietary technology that protects heating element from static electricity.
- ◆ High dot density of 12dots/mm

**[Feature]**

- Print speed: 100mm/s
- High reliability with anti-static protect film
- Aluminum heatsink assembled TPH offers you easy installation.
- No need for resistance value ranking setting

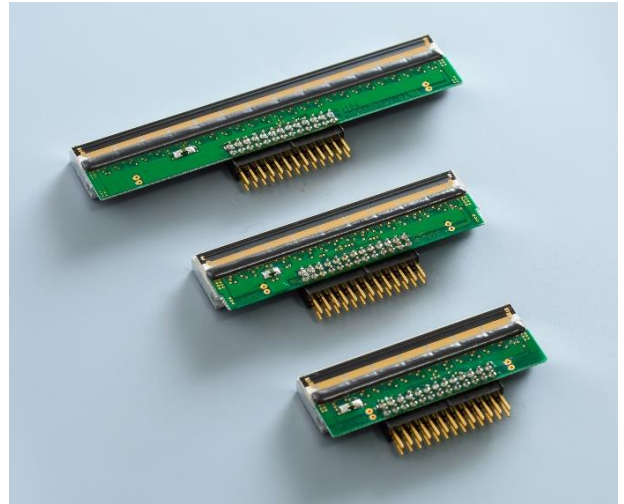


※ Flexible design of pin assignment or heatsink shape in accordance with customer's requirement thanks to our experienced engineers.

**■ Outline spec**

	Print width	Resistance value	Dot density	Platen diameter	Print speed	Vset	Vdd	# of strobe	Printing life	Pulse life
AU056-G12F600	56mm	1000 Ω	12dot/mm	φ 20mm	100mm/s	24V	3.3~5.0V	4	100km	100M pulse
AU081-G12F600	81mm									
AU105-G12F600	105mm									

**■ External dimension(mm)**

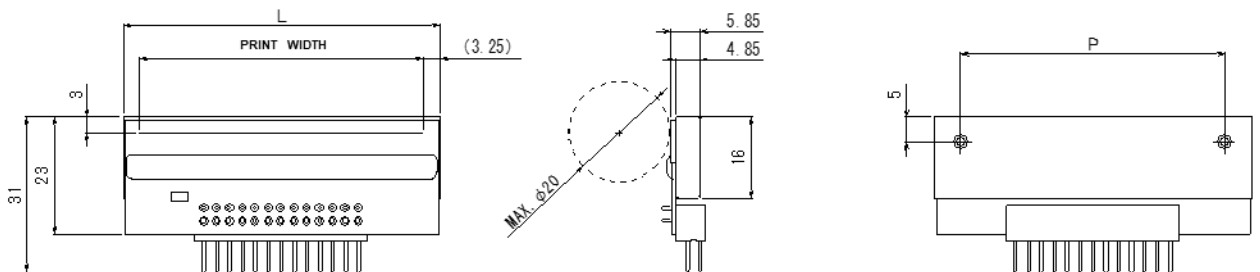

	L	P
AU056-G12F600	62.5	52
AU081-G12F600	91	80.5
AU105-G12F600	118	107.5