

KJ-SAJ series

- ◆ Space saving type with its volume 30% reduced from our ordinary product.
- ◆ Low current consumption suitable for battery driven handy printer.

【Feature】

- High print efficiency with reduced pattern resistance.
- 192 bit Dr. IC mounted
- 1.0 mm pitch contact terminal available
- No need for resistance value ranking setting




※ Flexible design of pin assignment or heatsink shape in accordance with customer's requirement thanks to our experienced engineers.

■ Outline spec

	Print width	Resistance value	Dot density	Platen diameter	Print speed	Vset	Vdd	# of strobe	Printing life	Pulse life
KJ-SAJ048-8X470	48mm	176Ω	8dot/mm	φ8mm	100mm/s	4.0~8.5V	3.0~5.0V	6	100km	100M pulse
KJ-SAJ072-8X572	72mm							5		
KJ-SAJ104-8A350	104mm							7		
KJ-SAJ048-8D977	48mm	80Ω	8dot/mm	φ8mm	75mm/s	2.7~5.0V	3.0~5.0V	1	100km	100M pulse

■ External dimension(mm)

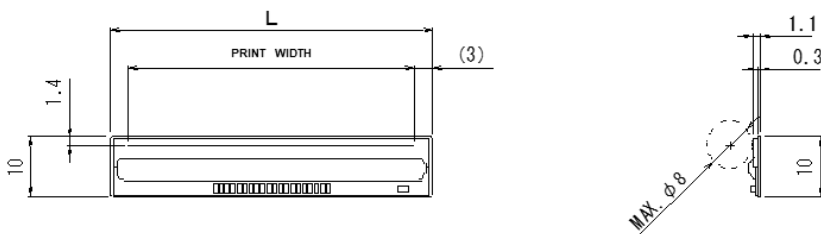

	L
KJ-SAJ048-8X470	54
KJ-SAJ072-8X572	78
KJ-SAJ104-8A350	110
KJ-SAJ048-8D977	54