

- ◆Eco-friendly TPH with reduced current consumption during printing.
- ◆Small, light weighted, and energy saving type based our proprietary technology for POS/ECR.

[Feature]

- Print speed: 150mm/s
- 192 bit Dr.IC mounted
- High reliability with anti-static protect film
- Aluminum heatsink assembled TPH offers you easy installation.
- No need for resistance value ranking setting




※ Flexible design of pin assignment or heatsink shape in accordance with customer's requirement thanks to our experienced engineers.

■ Outline spec

	Print width	Resistance value	Dot density	Platen diameter	Print speed	Vset	Vdd	# of Strobe	Printing life	Pulse life
TAU048-H8T800	48mm	1500Ω	8dot/mm	φ17mm	150mm/s	24V	3.3~5.0V	2	200km	200M pulse
TAU056-H8T800	56mm									
TAU072-H8T800	72mm									
TAU108-H8T800	108mm									

■ External dimension(mm)

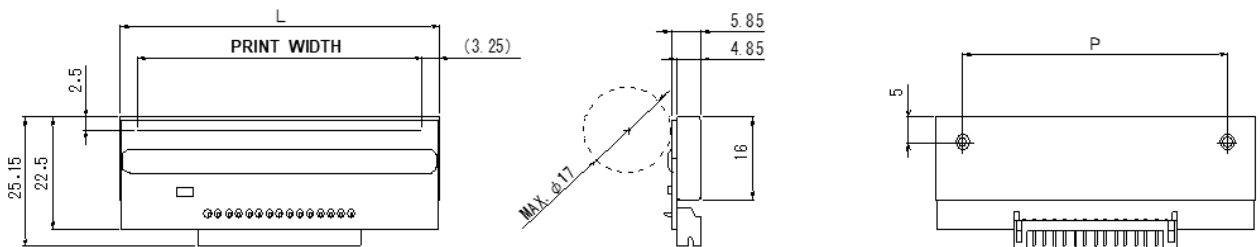

	L	P
TAU048-H8T800	54.5	44
TAU056-H8T800	62.5	52
TAU072-H8T800	78.5	68
TAU108-H8T800	117	106.5