

TAU-L8T series

- ◆ High reliability with protect film based on our proprietary technology that protects heat element from static electricity.
- ◆ Ultra high speed suitable for bar code printer.

【Feature】

- Print speed: 400mm/s
- 192 bit Dr.IC mounted
- High reliability with anti-static protect film.
- With 1.25mm pitch connector
- No need for resistance value ranking setting




※ Flexible design of pin assignment or heatsink shape in accordance with customer's requirement thanks to our experienced engineers.

■ Outline spec

| | Print width | Resistance value | Dot density | Platen diameter | Print speed | Vset | Vdd | # of strobe | Printing life | Pulse life |
|---------------|-------------|------------------|-------------|-----------------|-------------|------|----------|-------------|---------------|------------|
| TAU056-L8T820 | 56mm | 550Ω | 8dot/mm | φ14mm | 400mm/s | 24V | 3.3~5.0V | 2 | 200km | 200M pulse |
| TAU072-L8T820 | 72mm | | | | | | | | | |
| TAU080-L8T820 | 80mm | | | | | | | | | |
| TAU108-L8T820 | 108mm | | | | | | | | | |

■ External dimension(mm)

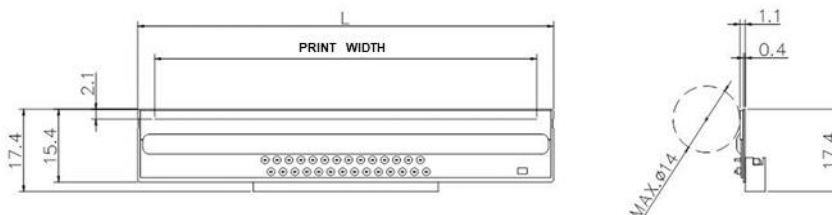

| | L |
|---------------|-----|
| TAU056-L8T820 | 63 |
| TAU072-L8T820 | 78 |
| TAU080-L8T820 | 87 |
| TAU108-L8T820 | 114 |