

TAU-S8T series

◆High reliability with protect film based on our proprietary technology that protects heat element from static electricity.

◆High speed suitable for bar code printer.

[Feature]

- Print speed: 350mm/s
- 192 bit Dr.IC mounted
- High reliability with anti-static protect film.
- Aluminum heatsink assembled TPH offers you easy installation.
- No need for resistance value ranking setting




※ Flexible design of pin assignment or heatsink shape in accordance with customer's requirement thanks to our experienced engineers.

■ Outline spec

	Print width	Resistance value	Dot density	Platen diameter	Print speed	Vset	Vdd	# of strobe	Printing life	Pulse life
TAU056-S8T800	56mm	650Ω	8dot/mm	φ 17mm	350mm/s	24V	3.3~5.0V	2	200km	200M pulse
TAU072-S8T800	72mm									
TAU080-S8T800	80mm									
TAU108-S8T800	108mm									

■ External dimension(mm)

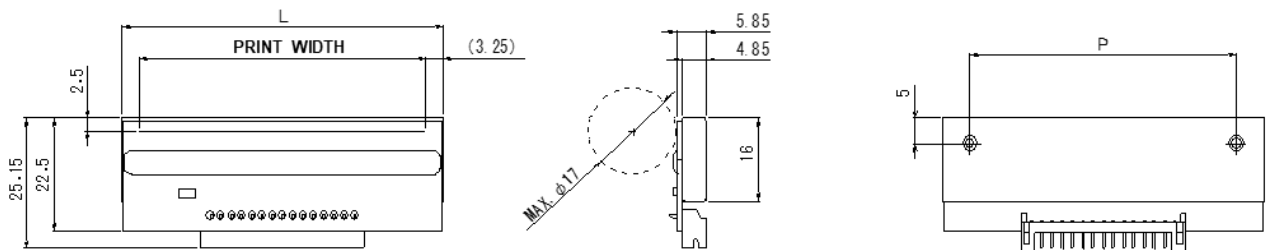

	L	P
TAU056-S8T800	62.5	52
TAU072-S8T800	78.5	68
TAU080-S8T800	86.5	76
TAU108-S8T800	117	106.5